


Series 1544.B

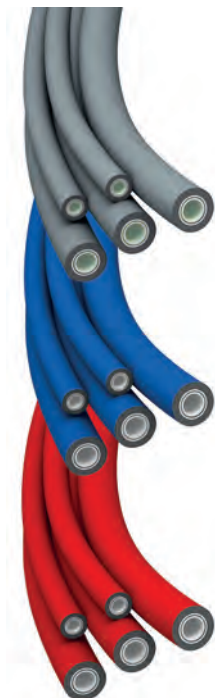

PE-RT RBM Tita-fix multilayer pipe in roll with thermal insulation - Grey

Code	Pipe size (mm)	Aluminium th. (mm)	Roll (m)	Pack (m)	Pallet- (m)	Cat.
1544.16.50	16x2	0,20	50	1	750	10.01
1544.20.50	20x2	0,30	50	1	650	10.01
1544.26.50	26x3	0,40	50	1	600	10.01
1544.32.50	32x3	0,40	25	1	300	10.01

PE-RT RBM Tita-fix multilayer pipe in roll with thermal insulation - Blue

Code	Pipe size (mm)	Aluminium th. (mm)	Roll (m)	Pack (m)	Pallet- (m)	Cat.
1946.16.20	16x2	0,20	50	1	750	10.01
1946.20.20	20x2	0,30	50	1	650	10.01
1946.26.20	26x3	0,40	50	1	600	10.01
1946.32.20	32x3	0,40	25	1	300	10.01

PE-RT RBM Tita-fix multilayer pipe in roll with thermal insulation - Red

Code	Pipe size (mm)	Aluminium th. (mm)	Roll (m)	Pack (m)	Pallet- (m)	Cat.
1946.16.30	16x2	0,20	50	1	750	10.01
1946.20.30	20x2	0,30	50	1	650	10.01
1946.26.30	26x3	0,40	50	1	600	10.01
1946.32.30	32x3	0,40	25	1	300	10.01

Size: Outside Ø x pipe thickness

*Insulation thickness compliant with law 09 January 1991 n. 10 and valid for pipes installed in heated premises and/or facilities neither facing outside or unheated rooms.

PE-RT RBM Tita-fix multilayer pipe externally insulated with closed cell expanded polyethylene conduit, CFC-free, flame retardant.

Pipe features as in code 1545-1546.

Insulating conduit features:

- Density 35 kg/m³
- Thermal conductivity at 40 °C
- only conduit: 0.038 W/mK
- conduit + pipe (average value): 0.069 W/mK
- Steam permeability μ 5.482
- Insulation thickness 6 mm
- Type: PE-RT



Suitable for heating and domestic hot water distribution systems.

Certifications:

Compliant with: EN ISO 21003 - DM 174/04

