





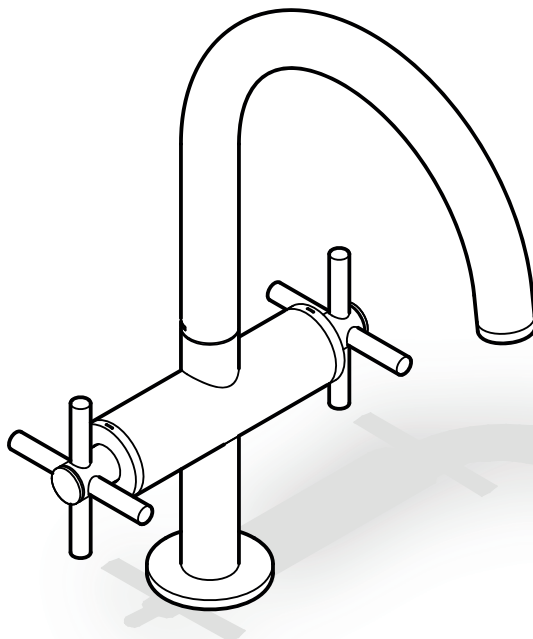

	DIN EN 806 DIN EN 1717 DIN 1988		 bar max. 10 0,5	 °C max. 70°

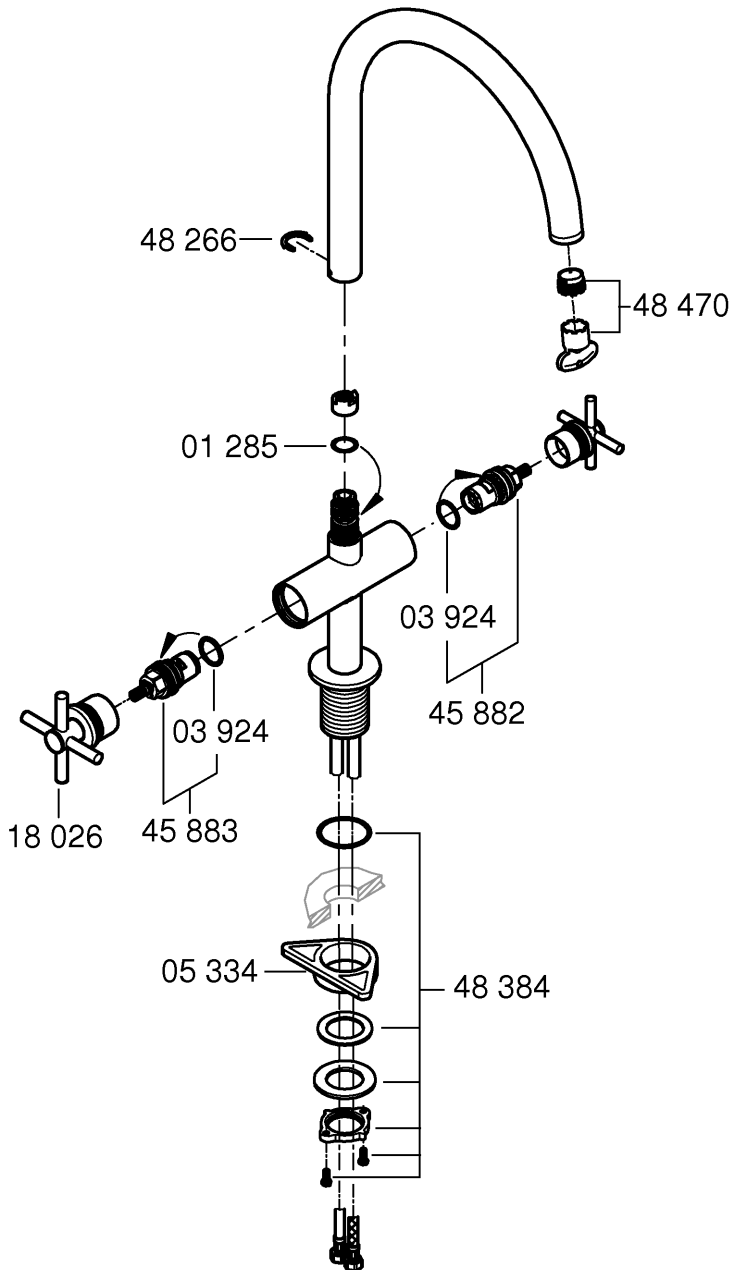


1


	150°	0°	360°





2




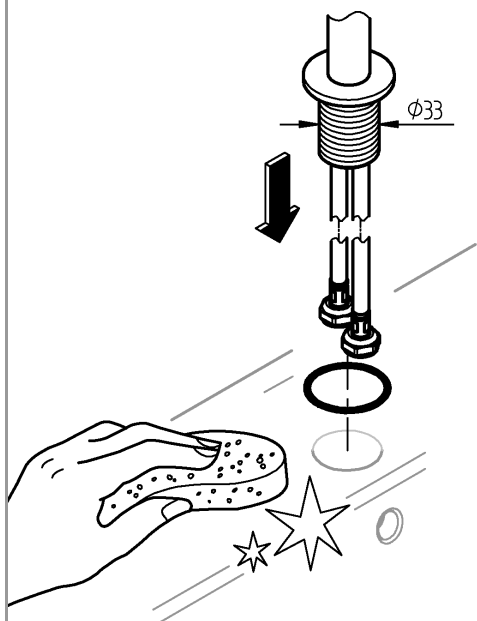


3

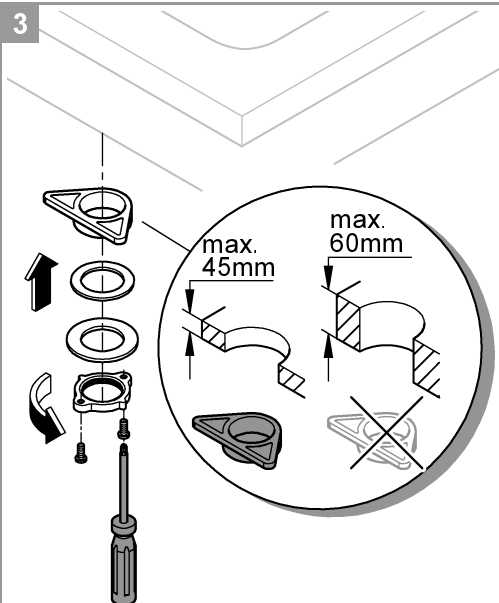


4

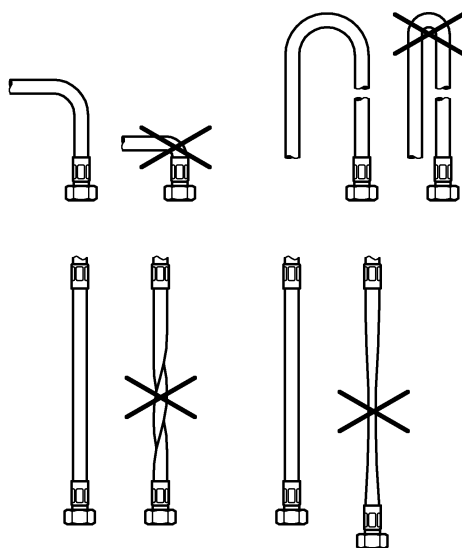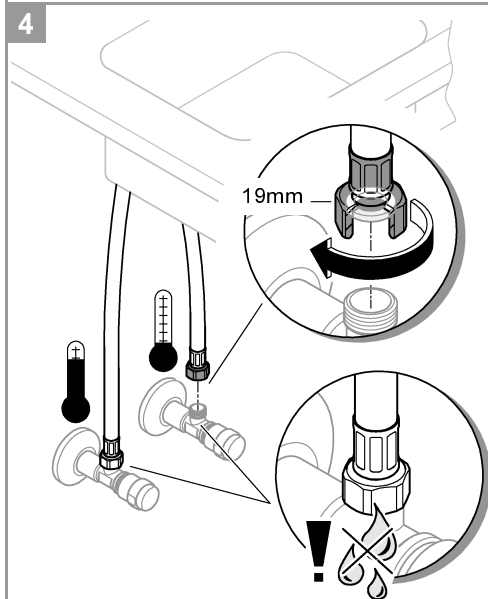

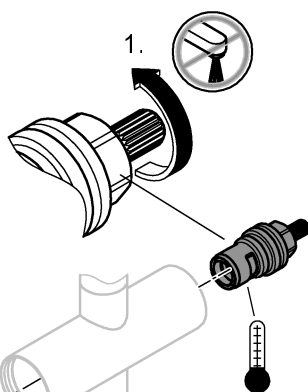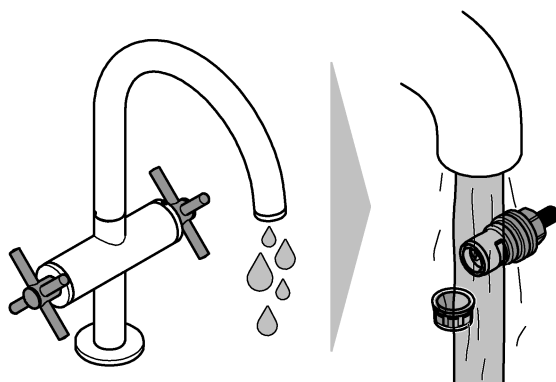

45 882

2.

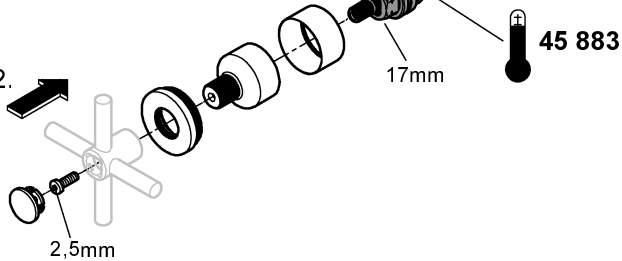

2,5mm

17mm

45 883

