




COOL-FIT 4.0 T90° equal d32-d225

Model:

- Pre-insulated PE100 SDR11, metric
- Insulation made from GF HE foam
- Outer jacket impact resistant. Color: black
- A: Electrofusion Fitting with integrated sealing lip, for a water and vapour tight sealing

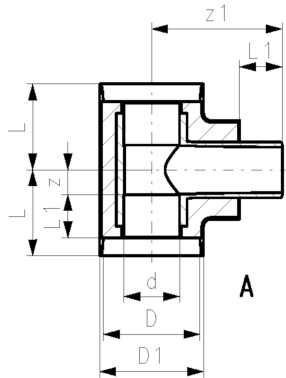

d	D	DN	SDR	PN	Code	Weight	D1	L	L1	Type	z	z1
(mm)	(mm)	(mm)		(bar)		(kg)	(mm)	(mm)	(mm)		(mm)	(mm)
32	90	25	11	16	738 203 108	0.161	97	79	36	A	18	118.0
40	110	32	11	16	738 203 109	0.257	117	87	40	A	22	132.0
50	110	40	11	16	738 203 110	0.342	117	94	44	A	25	138.0
63	125	50	11	16	738 203 111	0.514	132	103	48	A	30	154.0
75	140	65	11	16	738 203 112	1.000	147	116	55	A	36	168.0
90	160	80	11	16	738 203 113	1.400	168	130	62	A	43	187.0
110	180	100	11	16	738 203 114	2.500	188	154	72	A	57	207.0
140	225	125	11	16	738 203 116	4.627	233	175	84	A	66	257.3
160	250	150	11	16	738 203 117	5.600	258	192	90	A	77	263.0
225	315	200	11	16	738 203 120	16.748	324	355	110	A	220	337.0

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>