




TP Blind flange PVC-U metric

Bolt holes PN10

- **DN** indicates the nominal diameter of the PVC pipe
- Maximum medium- or ambient temperature 45°

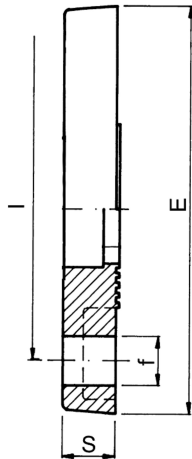

d	DN	PN	Code	SP	Weight	f	S	I	E
(mm)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)
20	15	10	RV0FCI200	120	0.076	14	11	65	95
25	20	10	RV0FCI250	100	0.100	14	12	75	105
32	25	10	RV0FCI320	140	0.139	14	14	85	115
40	32	10	RV0FCI400	100	0.212	18	15	100	140
50	40	10	RV0FCI500	70	0.257	18	16	110	150
63	50	10	RV0FCI630	50	0.348	18	18	125	165
75	65	10	RV0FCI750	25	0.503	18	19	145	185
90	80	10	RV0FCI900	20	0.625	18	20	160	200
110	100	10	RV0FCI910	25	0.828	18	22	180	220
125	110	10	RV0FCI920	20	0.940	18	24	190	230
140	125	10	RV0FCI930	18	1.173	18	26	210	250
160	150	10	RV0FCI940	14	1.609	22	28	240	285
200	200	10	RV0FCI960	8	2.480	22	30	295	340
225	200	10	RV0FCI970	8	2.430	22	30	295	340

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>