



Lug-Style end installation butterfly valve type 146 PVC-U
With electric actuator 24V
Without manual override
Flange standard metric

Model:


- Voltage 24V AC/DC
- Factory set control range 90°<
- Heating element, position feedback (Open/Close/ Middle)
- Overall length according to EN 558, ISO 5752 (DN50-200 line 25, DN250-300 line 16)
- Connecting dimension: ISO 7005 PN10, EN 1092 PN10, DIN 2501 PN10

Option:

- Other valve and actuator configurations available
- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

Note:

For some material combination (e.g. DN300 valves with PE/PP pipes) special flange adapters are needed. Please check the "Perfect flange connection tool" on www.gfps.com

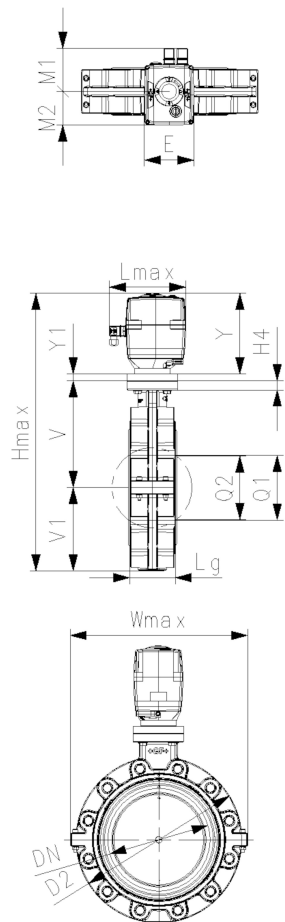

d	Size	DN	PN	kv-value	EPDM	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code	(kg)
				(l/min)		
63	2	50	10	740	199 146 122	4.299
75	2 ½	65	10	1500	199 146 123	4.456
90	3	80	10	2400	199 146 124	4.701
110	4	100	10	3800	199 146 125	5.606
140	5	125	10	8600	199 146 126	7.120
160	6	150	10	11400	199 146 127	8.881
225	8	200	10	19900	199 146 128	13.625
280	10	250	10	34000	199 146 129	24.385
315	12	300	5	50000	199 146 130	30.916

d	Hmax	Lmax	Wmax	U	V	H4	V1	Lg	D2	Q1	Q2	d2	k	Y
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	378.3	190	165	90	133.3	23	78.8	44.7	160	40		M16	125	166.2
75	391.2	190	182	90	139.9	23	85.1	45.7	180	54	35	M16	145	166.2
90	426.1	190	210	90	145.6	23	91.2	48.7	195	67	50	M16	160	189.3
110	462.8	190	240	90	166.0	23	107.5	55.6	226	88	74	M16	180	189.3
140	492.0	190	272	90	180.0	23	122.7	63.5	258	113	97	M16	210	189.3
160	522.8	190	300	90	189.0	23	134.5	71.5	284	139	123	M20	240	199.3
225	571.3	190	360	90	210.5	23	161.5	72.5	341	178	169	M20	295	199.3
280	670.6	190	440	125	264.4	23	206.9	113.2	412	210	207	M20	350	199.3
315	720.0	190	510	125	285.2	23	235.5	114.6	482	256	253	M20	400	199.3

d	E	Y1	M1	M2
(mm)	(mm)	(mm)	(mm)	(mm)
63	122.3		107.3	82.7
75	122.3		107.3	82.7
90	122.3		107.3	82.7
110	122.3		107.3	82.7
140	122.3		107.3	82.7
160	122.3		107.3	82.7
225	122.3		107.3	82.7
280	122.3	17.0	107.3	82.7
315	122.3	17.0	107.3	82.7

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 1/23/24



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>