

# APZ18-650M Simple

Shower drain with a stainless steel edge for perforated grids

## Application


For wheelchair access  
For drainage of floor-level showers  
For installation into open spaces or near the wall of the shower area  
For indoor use

## Features

- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic shower drain with stainless steel edge, which is tightly fixed around the circuit
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0-35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

## Scope of supply

- Dismantling hook
- Fixation set for attaching the adjustable legs: screw 4.2x9.5 – 4 pcs
- Fixation set: screw Ø4,2x38 – 4 pcs, dowel Ø8 – 4 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 8 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 2 pcs
- Linear shower drain

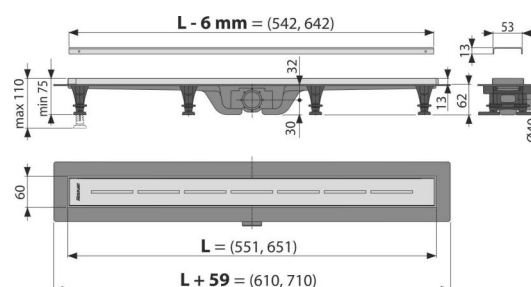

## Order number, Logistic information

| Code       | EAN           |        | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|------------|---------------|--------|--------------------------------------|---------------------------------|--------------------------------|
| APZ18-650M | 8595580556594 | 650 mm | 1,7723   1,7723   159,5070 kg        | 765x80x145   1176x768x410 mm    | 45   90 pcs                    |

| Warranty    | Customs code | Norms   |
|-------------|--------------|---------|
| 2/6 years * | 39229000     | EN 1253 |

## Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 27 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm