


Collet à souder Geberit PE

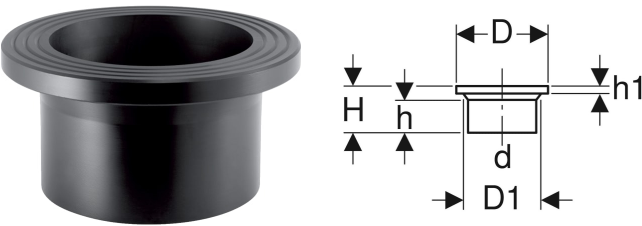

Exemple d'image

UTILISATION

- Pour l'évacuation des bâtiments
- Pour l'évacuation des eaux de ruissellement
- Pour combiner avec des brides folles Geberit PE

CARACTÉRISTIQUES TECHNIQUES

Matériau PE-HD

N° de réf.	DN	d, ø mm	D cm	D1 cm	H cm	h cm	h1 cm
361.744.16.1	50	50	8	5.4	6	4.2	0.8
363.744.16.1	56	56	9	6.8	6	3.6	0.8
364.744.16.1	60	63	9	6.8	6	3.7	0.8
365.744.16.1	70	75	11	7.8	6.5	4	0.9
366.744.16.1	90	90	12.8	9.6	7	4.4	1.1
367.744.16.1	100	110	14.8	11.6	7.5	4.8	1.2
368.744.16.1	125	125	16	13.1	8	5	1.4

N° de réf.	DN	d, ø mm	D cm	D1 cm	H cm	h cm	h1 cm
369.744.16.1	150	160	19.8	16.5	9	5.1	1.7
370.744.16.1	200	200	26	20.6	7.8	5.4	1.4
371.744.16.1	250	250	32.5	25.6	7.8	5.2	1.6
372.744.16.1	300	315	37	31.5	10	7	2