


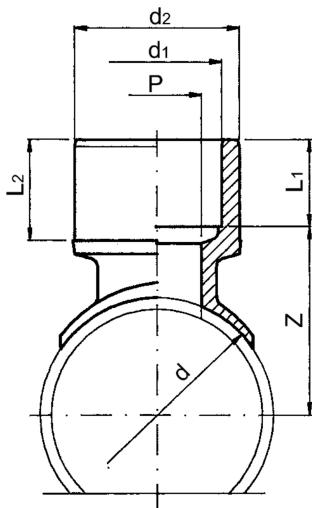

TP Saddle socket M/F PVC-U metric

d (mm)	d1 (mm)	d2 (mm)	PN (bar)	Code	SP	GP	Weight (kg)	Z (mm)	L2 (mm)	P (mm)	L1 (mm)
50	20	25	10	DV0DEI50B	15	150	0.012	43	19	14	16
50	32	40	10	DV0DEI50D	10	50	0.035	45	26	24	22
63	20	25	10	DV0DEI63B	15	150	0.040	49	19	14	16
63	25	32	10	DV0DEI63C	10	100	0.050	50	22	19	19
63	32	40	10	DV0DEI63D	10	50	0.040	51	26	24	22
75	50	63	10	DV0DEI75F	1		0.101	63	38	38	31
90	50	63	10	DV0DEI90F	1		0.108	71	38	38	31
90	63	75	10	DV0DEI90G	1		0.140	70	44	48	38
110	40	50	10	DV0DEI91E	1		0.058	78	31	30	26
110	50	63	10	DV0DEI91F	1		0.105	81	38	38	31
110	63	75	10	DV0DEI91G	1		0.136	80	44	48	38
125	50	63	10	DV0DEI92F	1		0.105	88	38	38	31
140	40	50	10	DV0DEI93E	1		0.059	93	31	30	26
140	63	75	10	DV0DEI93G	1		0.136	95	44	48	38
160	63	75	10	DV0DEI94G	1		0.133	105	44	48	38
200	63	75	10	DV0DEI96G	1		0.133	125	44	48	38
225	63	75	10	DV0DEI97G	1		0.137	138	44	48	38

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>