




Typ A



Typ B

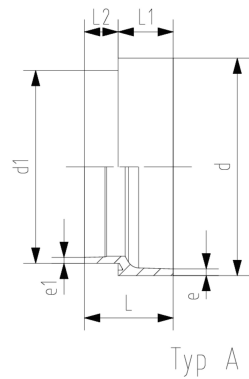

Typ A

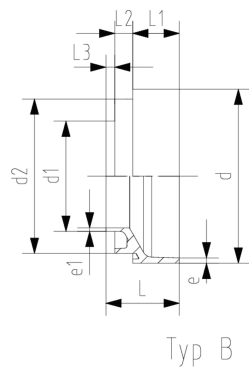

Typ B

SYGEF Plus reducer SDR33/PN10
High Purity clean-room product ISO Class 5 (100)

Model:

- Material: PVDF-HP

Note:

Type B: clamping for welding spigot d1 needs to be done on diameter d2

*d1 welding needs to be done on IR-315 A/ Plus

d - d1 (mm)	d2 (mm)	PN (bar)	FM	Type	Code	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	e (mm)	e1 (mm)
250 - 160	225	10	IR	B	735 908 522	100	42	33	10	7.7	4.9
250 - 160	225	10	IR	B	735 908 542	100	42	33	10	7.7	7.7
250 - 225		10	IR	A	735 908 524	90	42	33		7.7	6.9
250 - 225		10	IR	A	735 908 544	90	42	33		7.7	10.8
280 - 160	225	10	IR	B	735 908 525	100	50	33	10	8.6	4.9
280 - 160	225	10	IR	B	735 908 545	100	50	33	10	8.6	7.7
280 - 225		10	IR	A	735 908 527	90	50	33		8.6	6.9
280 - 225		10	IR	A	735 908 547	90	50	33		8.6	10.8
315 - 160	225	10	IR	B	735 908 528	115	50	33	10	9.7	4.9
315 - 160	225	10	IR	B	735 908 548	115	50	33	10	9.7	7.7
315 - 225		10	IR	A	735 908 530	105	50	33		9.7	6.9
315 - 225		10	IR	A	735 908 550	105	50	33		9.7	10.8
* 355 - 225		10	IR	A	735 908 535	150	95	43		10.9	6.9
* 355 - 315		10	IR	A	735 908 534	145	90	55		10.9	9.7
* 400 - 225		10	IR	A	735 908 537	150	95	43		12.3	6.9
* 400 - 315		10	IR	A	735 908 536	145	90	55		12.3	9.7

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>