




Operating Guide




AB-PM/AB PM HP (DN 10-32)

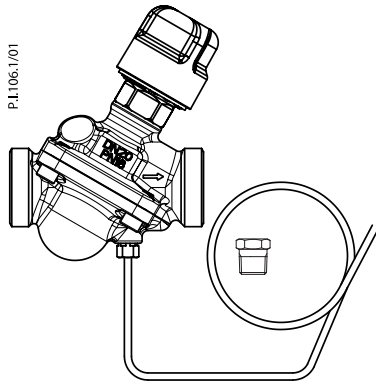

TWA-Z/ABN A5



IP 41/IP 54

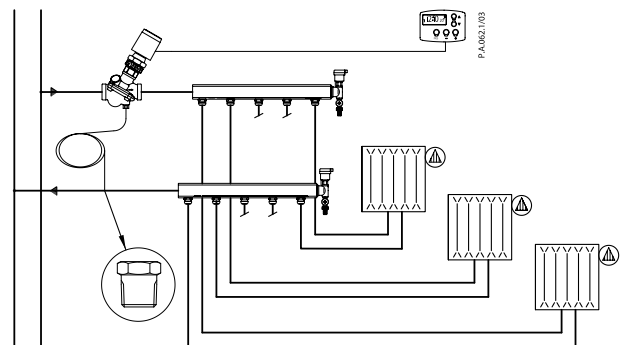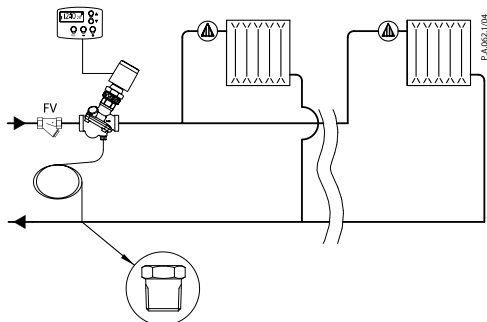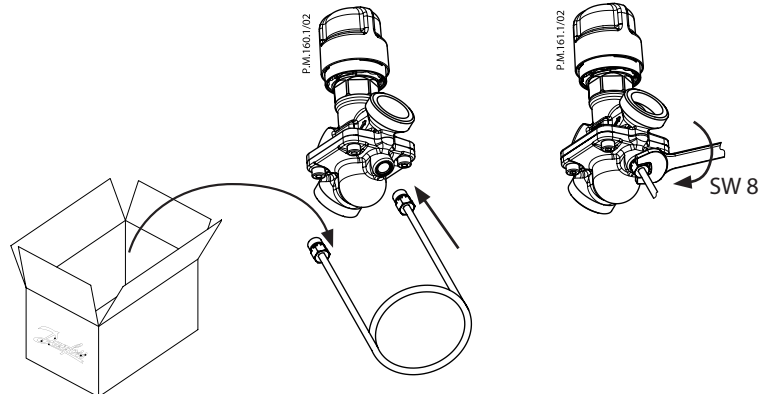


AB-PM/AB-PM HP (DN 10-32)


Manual Shut-off-plastic

Included with all AB-PM valves
 $\Delta p_{max} = 1 \text{ bar}$

Code No.:
003Z0250




P.S.059.1/01




Clockwise: Close
Counter-Clockwise: Open


Mounting actuator

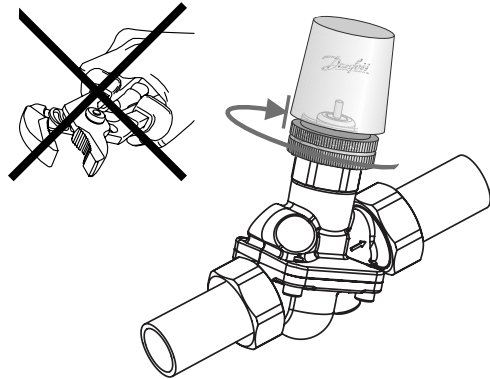


Flow Direction

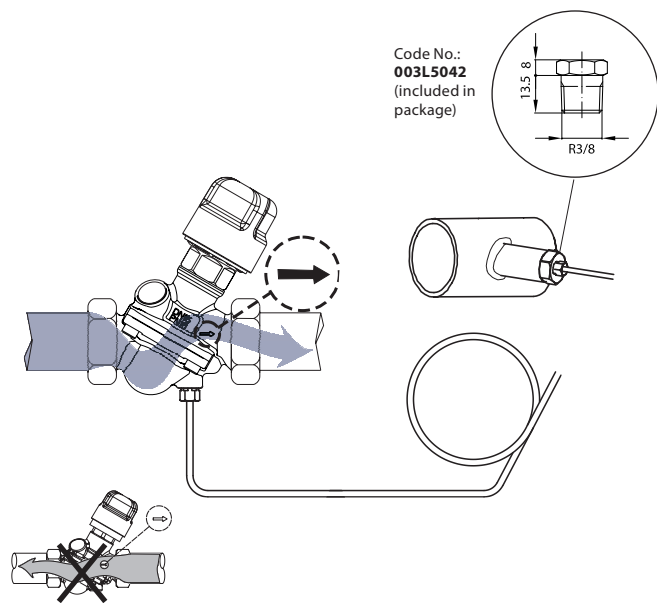

Code No.:
003L5042
(included in package)




Assembly

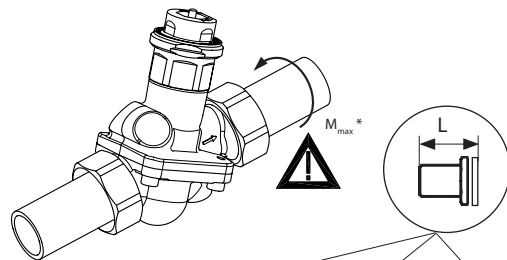

DN			Code No.			Code No.
	To pipe	L (mm)		Weld.c. L (mm)	Solder.c. L (mm)	
10*	R 3/8	26	003Z0231		17	065Z7016
15	R 1/2	27.5	003Z0232	37	003Z0226	22
20	R 3/4	30.5	003Z0233	42	003Z0227	
25	R 1	35	003Z0234	42	003Z0228	
32	R 1 1/4	38.5	003Z0235	42	003Z0229	

* M_{max} for DN 10 is 35 Nm

Locking

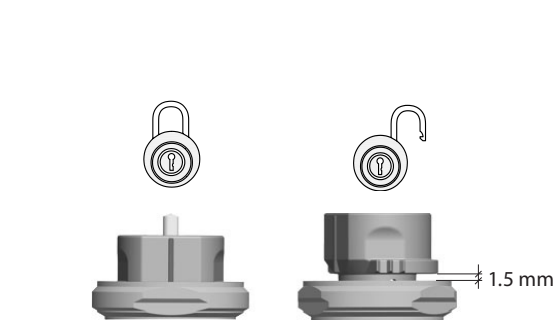

Setting

