

Art. 8270

**Manchon usiné FF, acier inoxydable CF8M (316),
PN20, ISO 4144 (type S2)**

**FF machined socket, stainless steel CF8M (316),
PN20, ISO 4144 (type S2)**

**Manguito mecanizado HH, acero
inoxidable CF8M (316), PN20, ISO 4144 (tipo S2)**



Conditions d'utilisation - Conditions of use - Condiciones de uso

- Fluides : tous fluides compatibles avec l'acier inoxydable.
- Pression : PN 20 bar
- Températures : -20/+220°C

- Fluids : all fluids compatibles with stainless steel.
- Pressure : PN 20 bar
- Temperatures : -20/+220°C

- Fluidos : Todos los fluidos compatibles con el acero inoxidable.
- Presión : PN 20 bar
- Temperaturas : -20/+220°C

Caractéristiques techniques - Technical features - Características técnicas

- Conçu, fabriqué et contrôlé selon la norme ISO 4144.
- Procédé de fabrication : Moulage à la cire perdue.
- Matière : Acier inoxydable CF8M (AISI 316).
- Raccordements : Embouts taraudés **Rp** selon norme ISO 7-1 (BSP série R).

- Designed, manufactured and controlled according to ISO 4144 standard.
- Manufacturing process : Lost-wax casting.
- Material : Stainless steel CF8M (AISI 316).
- Connections : **Rp** female threaded ends according to ISO 7-1 standard (BSP R-series).

- Diseñada, fabricada y controlada según la norma ISO 4144.
- Proceso de fabricación : Moldeo a la cera perdida.
- Materia : Acero inoxidable CF8M (AISI 316)
- Conexiones : Roscas hembra **Rp** según la norma ISO 7-1 (BSP serie R).

Certifications - Certifications - Certificaciones




Déclaration de conformité aux dispositions de l'arrêté du 29 Mai 1997 modifié relatif à la consommation humaine.

Declaration of conformity to French drinking water regulation.

Declaración de conformidad a la regulación francesa relativa al agua potable.



Dimensions et données techniques - Dimensions & technical data - Dimensiones y datos técnicos

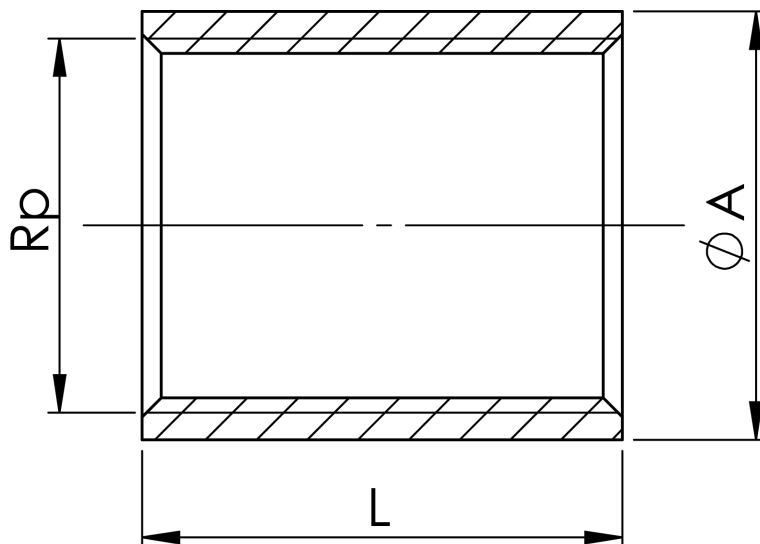

Référence Item no. Código	DN	Rp	ØA	L	PN (bar)	Poids Weight Peso (Kg)
8002700000800	8	1/4"	16,5	23	20	0,019
8002700001200	12	3/8"	20,5	25	20	0,025
8002700001500	15	1/2"	25	32,5	20	0,044
8002700002000	20	3/4"	30	35	20	0,055
8002700002600	25	1"	38	42,5	20	0,106
8002700003300	32	1"1/4	47	48	20	0,172
8002700004000	40	1"1/2	53	48	20	0,181
8002700005000	50	2"	66	55,5	20	0,332
8002700006600	65	2"1/2	82	63	20	0,509
8002700008000	80	3"	96,5	70	20	0,776
8002700010200	100	4"	121,5	81,5	20	1,165

● Graphique Pression/température - Pressure/Temperature chart - Gráfico Presión/Temperatura

