


Diaphragm valve DIASTAR Six PVC-U
FC (Fail safe to close)
With solvent cement spigots metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- Overall length EN 558

Option:

- Individual configuration of the valve

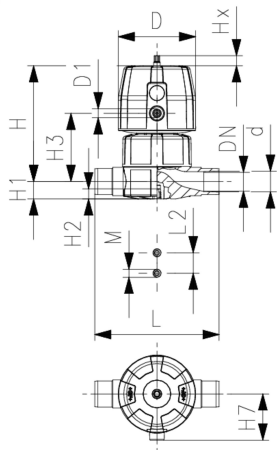

d	DN	Size	PN	kv-value	EPDM	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)
				(l/min)			
25	20	¾	6	271	161 615 013	1	0.964
32	25	1	6	481	161 615 014	1	1.137
40	32	1 ¼	6	759	161 615 015	1	2.414
50	40	1 ½	6	960	161 615 016	1	2.482
63	50	2	6	1181	161 615 017	1	3.340

d	D	D1_G	H	H1	H2	H3	H7	L	L2	M	Lift =	closest
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		Hx	inch
											(mm)	(inch)
25	96	¾	132	18	12	73	57	144	25	M6	10	¾
32	96	¾	143	22	12	84	57	154	25	M6	13	1
40	120	¾	173	26	15	99	69	174	45	M8	14	1 ¼
50	120	¾	193	32	15	119	69	194	45	M8	16	1 ½
63	120	¾	205	39	15	132	69	224	45	M8	16	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>