




**SYGEF Plus flange adaptor JIS
SDR21/PN16
High Purity clean-room product ISO Class 5 (100)**

Model:

- Material: PVDF-HP

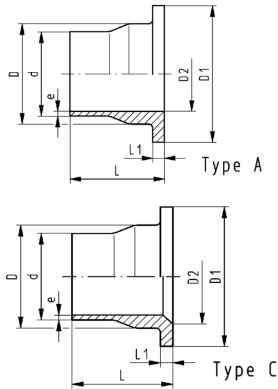

d	DN	PN	FM	Type	Code	Weight	L	L1	D	D1	D2	e
(mm)	(mm)	(bar)				(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
20	15	16	BCF, IR	A	735 805 926	0.022	54	6	26	34	15	1.9
25	20	16	BCF, IR	A	735 805 927	0.032	56	7	32	41	20	1.9
32	25	16	BCF, IR	A	735 805 928	0.051	58	7	40	50	26	2.4
40	32	16	BCF, IR	A	735 805 929	0.077	68	8	49	61	34	2.4
50	40	16	BCF, IR	A	735 805 930	0.118	69	8	60	73	42	3.0
63	50	16	BCF, IR	A	735 805 931	0.174	72	9	75	90	56	3.0
75	65	16	BCF, IR	A	735 805 932	0.255	80	10	89	106	66	3.6
90	80	16	BCF, IR	A	735 805 933	0.333	80	11	105	125	78	4.3
110	100	16	BCF, IR	C	735 805 934	0.556	80	12	125	150	100	5.3
140	125	16	IR	C	735 798 841	0.887	90	16	155	188	127	6.7
160	150	16	IR	C	735 798 842	1.171	93	17	175	212	151	7.7
225	200	16	IR	C	735 798 845	2.064	102	22	235	268	207	10.8
250	250	16	IR	C	735 798 846	3.658	122	25	285	320	249	11.9
280	250	16	IR	C	735 798 847	3.586	122	25	291	320	249	13.4
315	300	16	IR	C	735 798 848	5.028	124	28	335	370	300	15.0

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>